

C1020...10PP... | C1019...10PP... | C1019...10PFC...(3)


Ø 10mm, 行星齿轮系列 Planetary Gearbox Series

应用领域: 医疗器械、安防设备、视像产品、高端智能电玩、个人保健产品等领域。

Applications: medical equipment, security systems and locks, audio and visual products, personal healthcare products, and high-end hobby products.

				C1020-110-2.5 -10PP171-0052	C1019-110-2.5 -10PP171-0050	C1019-180-3.0 -10PFC171-0097
电机参数 / Motor Data						
1	电压	Voltage	V	2.5	2.5	3.0
2	端电阻	Terminal resistance	Ω	3.7	3.5	1.8
3	空载转速	No-load speed	rpm	110	110	178
4	空载电流	No-load current	mA	100	80	90
5	最大转矩	Max torque	mNm	37.2	37.2	72
6	负载转矩	Load torque	mNm	9.8	9.8	9.8
7	负载转速	Load speed	rpm	80	80	153
8	负载电流	Load current	mA	230	240	320
9	减速比	Reduction ratio		1/171	1/171	1/171
10	重量	Weight	g	3.8	3.8	3.8
11	工作温度范围	Operating temperature range	°C	-10~+70	-10~+70	-10~+70
特性曲线 / Characteristics Curve						

C1020-110-2.5-10PP171-0052



— 转速 (N) — 电流 (I)

仅供参考, 详细了解请以产品规格书为准。
For reference only, please refer to the product specification.


可选配置 / Options

性能 Special coils: 连续运行范围内可定制 customizable in continuous operation rang

法兰 Flange: 标准前后法兰 standard front and rear flanges / 定制法兰 custom flanges

电气连接 Electrical connection: 端子或导线 connector or wire / 导线长度 lead wires length

外观图 / Outline Drawing

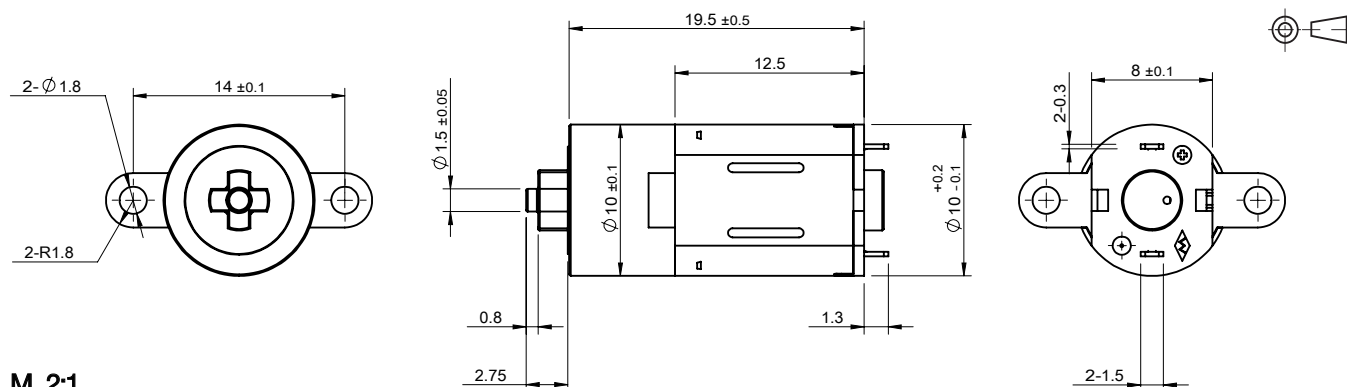

M 2:1