

2724ZDR $\varnothing 27\text{mm} \times 23.5\text{mm}$

应用领域：洗脸刷、脸部按摩仪、保健器材、清洁用具等。

Applications: facial brushes, facial massagers, health care products, cleaning equipment, etc.


-1-L7-30-3.7 -1-L14-50-2.5 -1-L19-35-5.0

电机参数 / Motor Data

| 序号 | 中文描述 | 英文描述 | 单位 | -1-L7-30-3.7 | -1-L14-50-2.5 | -1-L19-35-5.0 |
|----|---------|-----------------------------|--------------------|--------------|---------------|---------------|
| 1 | 电压 | Voltage | V | 3.7 | 2.5 | 5.0 |
| 2 | 直流电阻 | Resistance | Ω | 2.2 | 2.2 | 2.2 |
| 3 | 工作频率范围 | Operating frequency range | Hz | 100~220 | 100~220 | 100~220 |
| 4 | 空载振动频次 | No-load vibration frequency | Times/minute | 26400 | 26400 | 26400 |
| 5 | 空载振动电流 | No-load current | mA | 150 | 135 | 180 |
| 6 | 启动转矩 | Starting torque | mNm | 40 | 27 | 54 |
| 7 | 启动电流 | Starting current | A | 1.7 | 1.15 | 2.3 |
| 8 | 负载 (刷头) | Rated load (Brush head) | g | 10/31 | 10/31 | 10/31 |
| 9 | 负载振动频次 | Load vibration frequency | Times/minute | 20400 | 20400 | 20400 |
| 10 | 负载电流 | Load current | mA | 450 | 410 | 500 |
| 11 | 转子惯量 | Rotor inertia | gcm^2 | 1.35 | 1.35 | 1.35 |
| 12 | 重量 | Weight | g | 49 | 49 | 49 |
| 13 | 工作温度范围 | Operating temperature range | $^{\circ}\text{C}$ | -10~+60 | -10~+60 | -10~+60 |

特性曲线 / Characteristics Curve

2724ZDR-1-L7-30-3.7

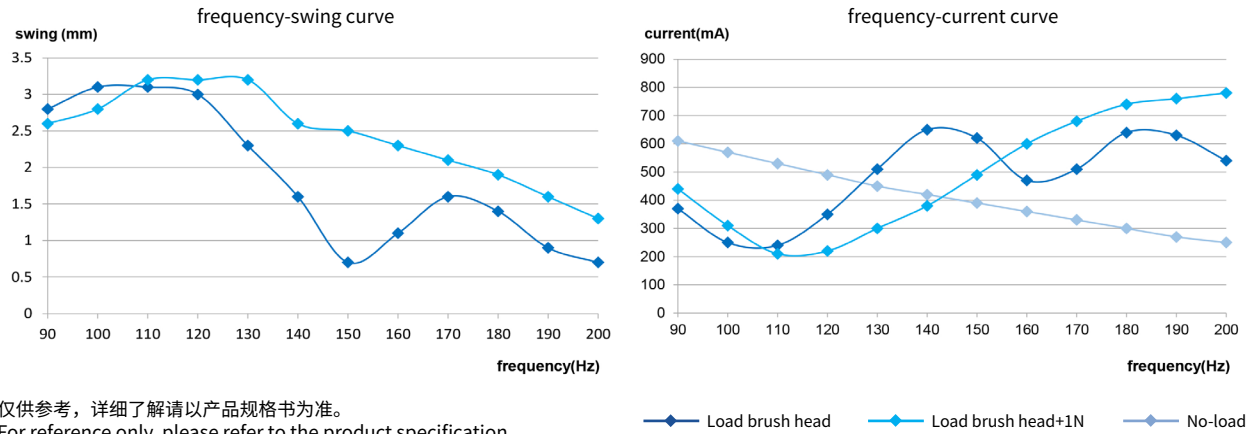

仅供参考，详细了解请以产品规格书为准。
For reference only, please refer to the product specification.

可选配置 / Options

性能 Special coils: 连续运行范围内可定制 customizable in continuous operation range

法兰 Flange: 标准前后法兰 standard front and rear flanges / 定制法兰 custom flanges

轴 Shaft: 长度 length / 异形 shape

电气连接 Electrical connection: 端子或导线 connector or wire / 导线长度 lead wires length

外观图 / Outline Drawing

